WIRING THE *BELTROL*
OM-3 ESC with PHOENIX PB9

TO RX

PLEASE NOTE. THE LIGHTING OUTPUTS & SOUND TRIGGERS
ARE ALL WIRED THE SAME WAY FOR ALL ESC'S.

+ - F R 1 2 3



THE # 2-M-Fv2 IS A PLUG IN SOLID STATE DEVICE THAT WILL PERMIT A FURTHER TWO FUNCTIONS.

THE # 2-M-Fv2 CAN BE USED WITH ANY OF THE *BELTROL* ESC's.

Volume control

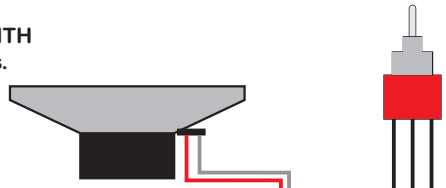

RCS RECOMMENDED TRIGGER CONNECTIONS SHOWN

GREEN

PURPLE

Programming

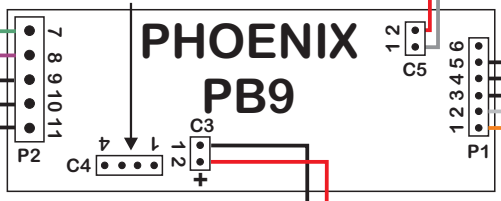

CHUFF TIMER

100 R

100 R

100 ohm ½ WATT RESISTORS

MOTOR REFERENCE VOLTAGE FOR DIESELS

BLACK

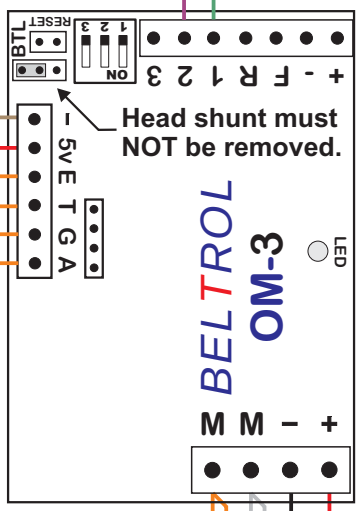

Head shunt must NOT be removed.

RED

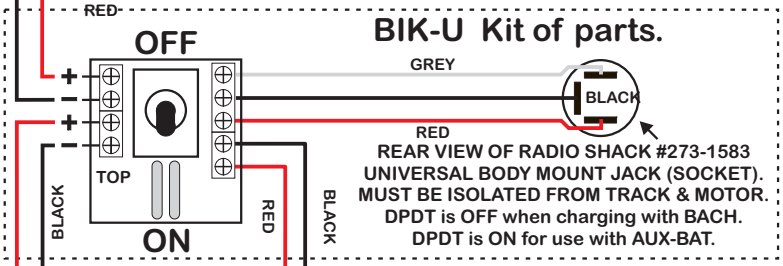

FUSE. We suggest you use a # RUE-300 3 amp Auto reset Polyswitch. NOT required with BIK-U3/6.

BATTERY PACK

12 - 24 VOLTS